

**Ordering codes    Description**

**WSA IN 10** 3 Beams barrier 1 Meter long

**WSA IN 15** 3 Beams barrier 1.5 Meters long

**WSA IN 20** 6 Beams barrier 2 Meters long

**WSA IN 25** 6 Beams barrier 2.5 Meters long

# USER MANUAL

**WSA IN 10 - 15**

**WSA IN 20 - 25**

**(Window security Alarm)**

**3 or 6 Beams barrier with self-contained electronic**

== APPLICATIONS ==

- **Anti-intrusion detection**
- **Access control**




**OPTEA s.r.l.**

Via Vinca , 7  
40016 S.Giorgio di Piano (BO) - ITALY

Tel.: +39 051 665.00.71 Fax.: +39 051 665.00.28

**Wiring to 3 Beams ( WSA IN - 10 /15)**

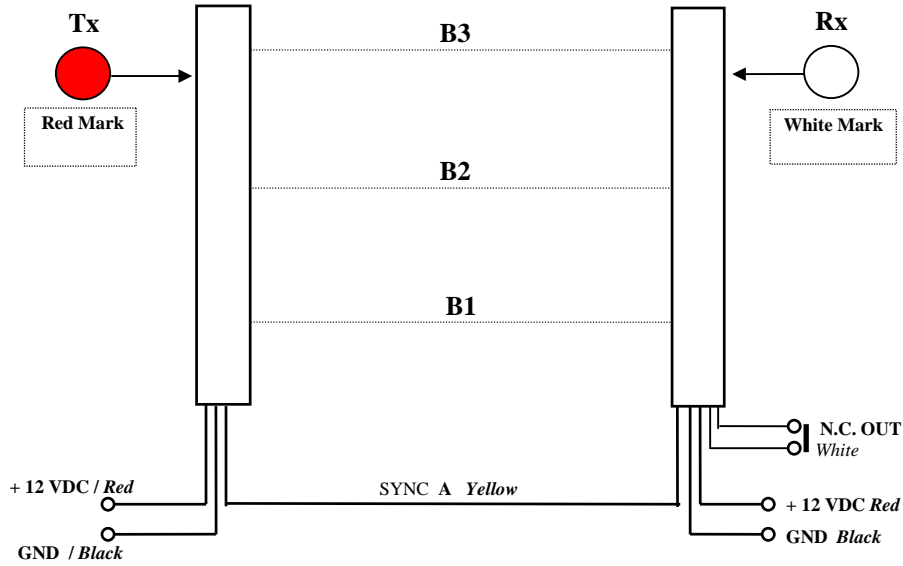

**Technical features**

- Supply voltage RANGE** : 12 Volt (10+14) Vdc
- Supply current** : 30mA (3 Beams) / 60mA (6 Beams)
- Operating Temperature** : (-15/+60)° C Ambient
- Output contact** : N.C. (Normally closed)
- Optical range** : 5 Meters
- Number of beams for alarm** : 1÷3/6 Automatic
- Turn OFF time** : 0.1÷ 1 Sec. Automatic selection (rely on number of interrupted beams)
- Turn ON time** : 1 Second
- IP Grade** : IP 44
- Cap mounting**

**Wiring to 6 Beams ( WSA IN - 20 /25)**

